



VPT-40/24V RAL7035

Article number: 200689

Pan/Tilt Head, 24VAC, RAL7035

Mainfeatures

20kg load capacity

50/60Hz operation

High torques

Rugged housing

Protection rating: IP66

Supply voltage: 24VAC

Backlash: <0,2°

Hardened gears

No maintenance required

Options: Heater

Specifications

Pattern	no
Autopan	no
Rotation range	359 °
Speed at nominal voltage	6°/sec. horizontal, 3°/sec. vertical (at 60 Hz: +20%)
Serial interfaces	voltage
Series	eneo VPT
Dimensions (HxWxD)	see drawing
Colour (housing)	RAL7035
Housing	Aluminium frame with plastic covers
Housing material	aluminium, plastic
Weight	6.5kg
Heater	optional
Positioned freely	no
Mounting of illuminator possible	optional

VPT-40/24V RAL7035

Continued Specifications

Protection rating	IP66
Supply voltage	24VAC
Temperature range (operation)	-20°C ~ +70°C
Temperature range with built-in heater	-40°C ~ +70°C
Load capacity	(load assembly in the horizontal and vertical center of gravity required)\$
Load capacity	20 kg
Backlash	<0.2°
Parts supplied	Screw set, 7-pin connector, Allen key (4mm)
Model	pan&tilt head





VPT-40/24V RAL7035

Available Accessories

Image	Prod. No / Label	Description
	202413 / WD-2N1G-RAL7035	Wall Bracket for Pan/Tilt Heads VPT-40, RAL7035
	203427 / WD-32 RAL7035	Wall Bracket for Pan/Tilt Heads, VPT-40/601/501 Series, RAL7035

VPT-40/24V RAL7035

Technical Drawing

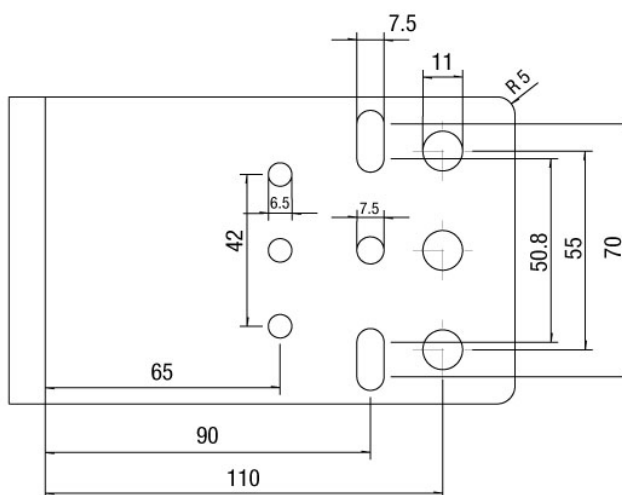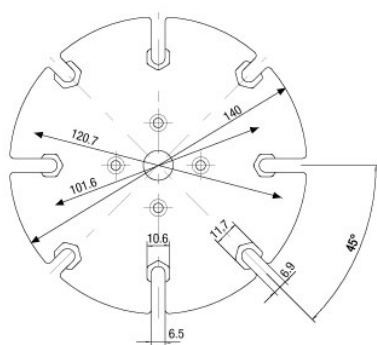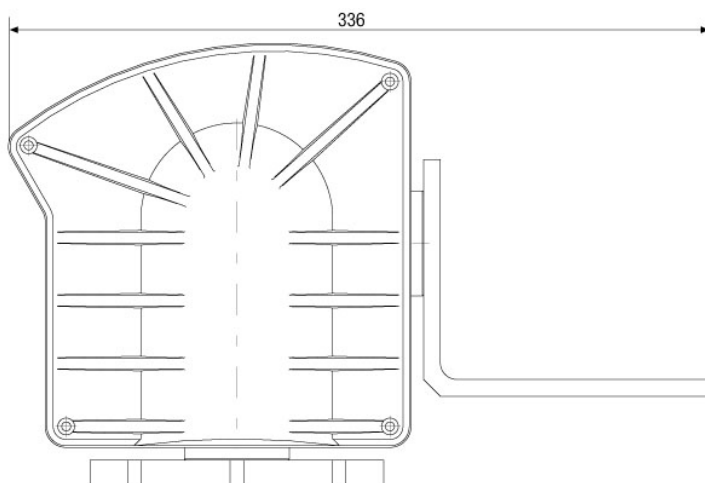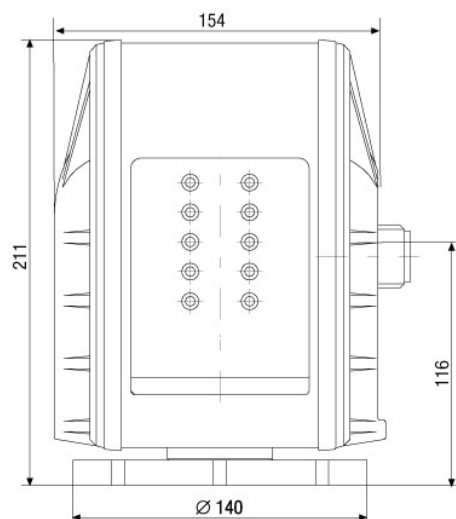

Maße/Dimensions: mm

Your Contact Person



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Deutschland
Tel.: +49 6074-888-333
E-Mail: info@eneo-security.com
Web: www.eneo-security.com